

R118B

The **R118B** by Shermann® (shown right with RS5 mid/hi pack) is another major advance in the development of compact, high power, low frequency drive systems.

The original 2001 design by Ken Hughes introduced VHR™ loading techniques within **R Series** LF products.

The technique offers major sonic advances through the combination of critical excursion control and a flare rate optimised for the desired response.



The British 18" LF driver operates within a compact, ported enclosure to provide smooth, high energy, extended low frequency drive below 35Hz.

Touring the R118B

Versatility is the keyword with all Shermann products and the R118B has been designed to maximise use within a wide variety of system combinations.

This compact, relatively lightweight low frequency workhorse is supplied with eight strategically placed handles to assist loading or stacking; the cabinet may be used in vertical or horizontal format.

Four x 100mm rear mounted swivel castors are supplied as standard whilst an *optional* castor attachment plate may be fitted to allow rapid removal of any castor for the odd occasion when load or stage space becomes a little tight.

A fully recessed, heavy duty 35mm pole mount is also fitted on the top of the R118B for use with our telescopic extension pole; these fittings will support a 40kg mid/high cabinet.

Installing the R118B

The numerous advantages of fully equipped Shermann touring boxes are also available to the installer.

From a totally basic model without handles or castors the R118B may also be specified in a variety of painted finishes and even supplied with flying equipment if space restrictions dictate that LF drive cabinets cannot be floor mounted.

Our expertise in the installation market allows us to offer superb sounding systems which are highly efficient, cost-effective and fully compatible with our customer's requirements.

Exterior fittings

Handles (sides x 6)

Steel bar (4) and large flip (2)

Handles (top and bottom x 2)

Steel recessed large flip type

Castors (rear mounted x 4)

100mm heavy duty swivel type.

Quick removal castor plate option*.

Finish

Heavy duty black carpet or optional textured paint finish - any colour *

Grille

Heavy duty welded mesh on steel frame c/w acoustically transparent foam and engraved logo.

Skids

Bottom and rear mounted easily replaced 18mm plywood skids

Flying Points (option)

1) GS-TA5 side and rear mounted track

2) GS-MA4 side mounted plates and rear strap plates

Construction

Cabinet shell

18mm multi-laminate Scandinavian birch plywood.

Baffle assembly

25mm multi-laminate Scandinavian birch plywood.

Connections

Speakon NL8

pin 1+ **hot** / pin 1- **cold**

Speakon NL4 (option) *

pin 1+ **hot** / pin 1- **cold**

Wiring (NL4 & NL8 connectors)

Brown + / Blue -

Connector / back plate options *

1) Dual NL8 - standard fitting

2) Dual NL4 on deep recessed

3) Dual NL4 plus 1 x NL8

All sockets are parallel linked on all available pins eg. 1+ 1- / 2+ to 2+ (see diagrams)

Crossover frequencies

High pass

25Hz 4th/8th order Linkwitz-Riley or Butterworth filtering



Low pass

110Hz 4th order Linkwitz-Riley

Note: The R118B is not available with internal passive filtering

* Options must be requested at time of ordering.

R118B

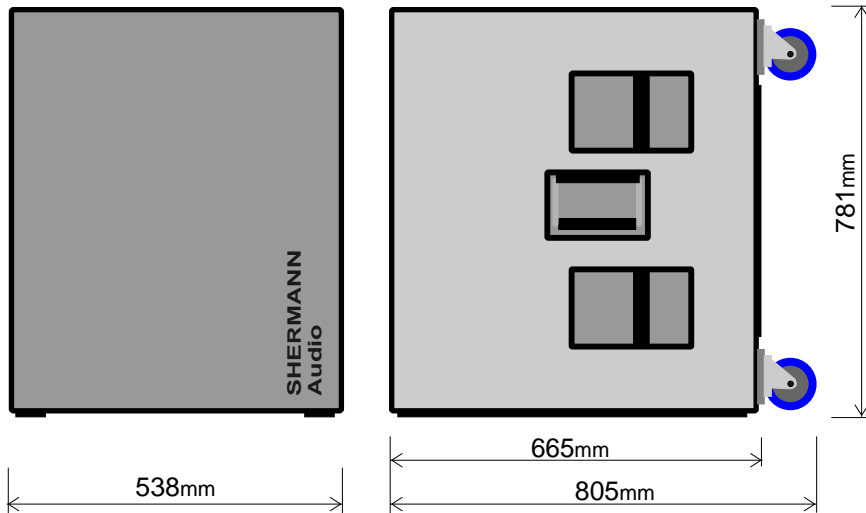


Speaker Cables

We recommend the use of 4mm² or 6mm² OFC cabling with all Shermann LF drive cabinets.

Wherever possible, cable lengths should not exceed 5 metres for 4 ohm loading (2 x 8ohm R118B in parallel); cabinet link cables should not exceed 1 metre.

Please call for details on Shermann cables - contact info shown below.

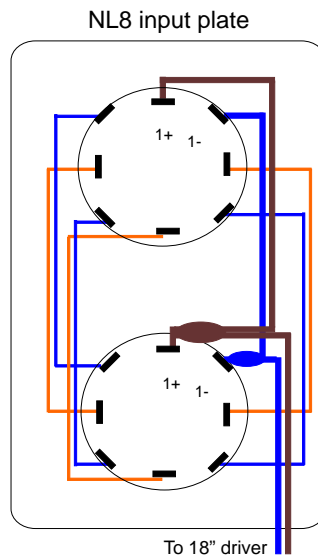

Please note

We would like to draw your attention to the likelihood of hearing damage from prolonged exposure to high sound pressure levels.

Care should be taken when using cabinets in close proximity to the audience, musicians or artists.

For further information on the safe operation of any Shermann product please fax, call or email us - contact details are shown below.

The information within this data sheet is accurate and correct at the time of publication.

It is recommended that all technical information is verified with the company before inclusion in quotations or tender documents.

The company will not be held responsible for losses or difficulties arising from errors, changes or omissions.

Tel: +44 (0)845 644 2209 (01686 622 997)

Fax: +44 (0)1686 623 233

Email: sales@shermann.com

Web: www.shermann.com

All data, images & product design; © Ken Hughes 2007. Shermann is a registered trade mark used by S.P.A. Systems Ltd

Technical Specifications

System

Format	VHR loading
Nominal impedance	8 ohm
Rec' amp' power @ 8ohm	350-600 watts rms
Programme power	1200watts

Performance

Sensitivity @ 1w/1m	97 dB
Output (peak)	127(130)dB @ 1m
Frequency response (-3dB)	35 Hz - 130 Hz

Components

Drive unit size	462 mm / 18"
Voice coil diameter	102 mm / 4"
Chassis	cast aluminium
Suspension	dual spider
Magnet	ferrite
Mounting	8mm caphead bolts x 6

Dimensions

Height	781 mm / 30.75"
Depth over castors	805 mm / 31.70"
Depth - excl' castors	602 mm / 26.20"
Width	538 mm / 21.20"
External volume	280 lts / 9.9 ft ³
Weight	54.6Kgs / 120 lbs

* Options must be requested at time of ordering.

For optimum performance and system protection we recommend the use of a digital loudspeaker management unit within systems incorporating the R118B. Klark-Teknik, BSS, Ashly and XTA manufacture suitable models which may be loaded with preset configurations to operate with any Shermann system.

The front foam used on this cabinet is not fire retardant.



ShermannAudio

R Series