

The **GS18x** powerful - portable - very loud.

The *Shermann GS18x* plays a **compact** but important role providing powerful LF drive as the ideal sonic partner to the G5 and G15

In theatres, pubs, churches, village halls, for school plays, at college gigs or even outdoors the GS18x brings the words *successful* and *impressive* back in to professional audio.

The GS18x with the highly versatile G5 or G15 allows the purchaser to go back to using four main boxes for audiences of 300 - 600 people with perhaps an additional V6 per side for the front rows.

Two GS18x with two G5 is rigged in a few minutes and the excellent results will be both successful and impressive.

The GS18x is a multi-gig workhorse model and it comes with the strongest of pedigrees.

The 18" bass driver.

The GS18x is equipped with a massive 18" bass driver highly efficient at fulfilling the requirement of super-powerful low end drive.

It features a high BL neodymium magnet assembly, 4.5" copper voice coil, dual suspension system and a cast aluminium chassis.

Using this 18" driver at its most efficient in the frequency bandwidth of 30 - 110hz the GS18x is ideal for use with a number of *Shermann* cabinets.

The GS18x cabinet.

Built from Eastern European 24mm birch plywood the GS18x is a conventionally shaped enclosure fitted with almost every facility currently available.

For ease of handling it's equipped with six strategically placed insert handles, four heavy duty 100mm castors on the back, a 20mm screw pole mount on the top with another mounted on one side, self-locating skids on the side & bottom plus two centrally mounted skids on the rear of the box between the castors.

Finally, the gigging version of the GS18x is coated with a dense, heavy duty textured material we've named TPC.

The coating is extremely durable and it's been proved that TPC retains its ability to protect the cabinet much longer than conventional paint finishes.

The results.

The GS18x is a high technology loudspeaker that's easier to use than almost any other loudspeaker system when connected to it's *Shermann* partner loudspeaker.

The required DSP settings are minimal in fact, the GS18x may be used with a completely flat crossover and external amplifier provided filter points are correctly set.

Along with superior sound quality ease of use is a priority for *Shermann's* designers.

The technicals.

Please see page 2 for mechanical and technical details.

Warning.



It should be remembered that the GS18x in combination with *Shermann* mid/high models such as the G5 or G15 is capable of high pressure levels therefore care should be taken in their positioning with regard to your audience. No responsibility will be accepted by the manufacturer, distributor or any other seller for the incorrect or foolish use of *Shermann* loudspeaker systems.



GS18x

GS18x

GS18x

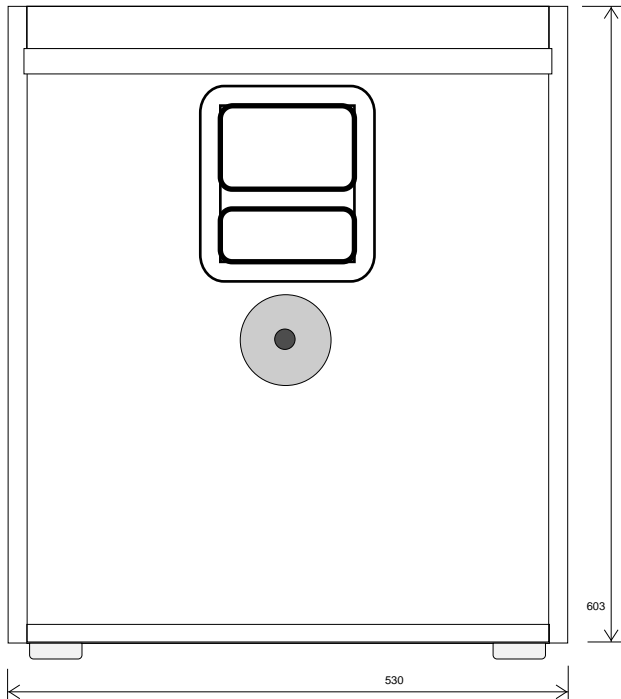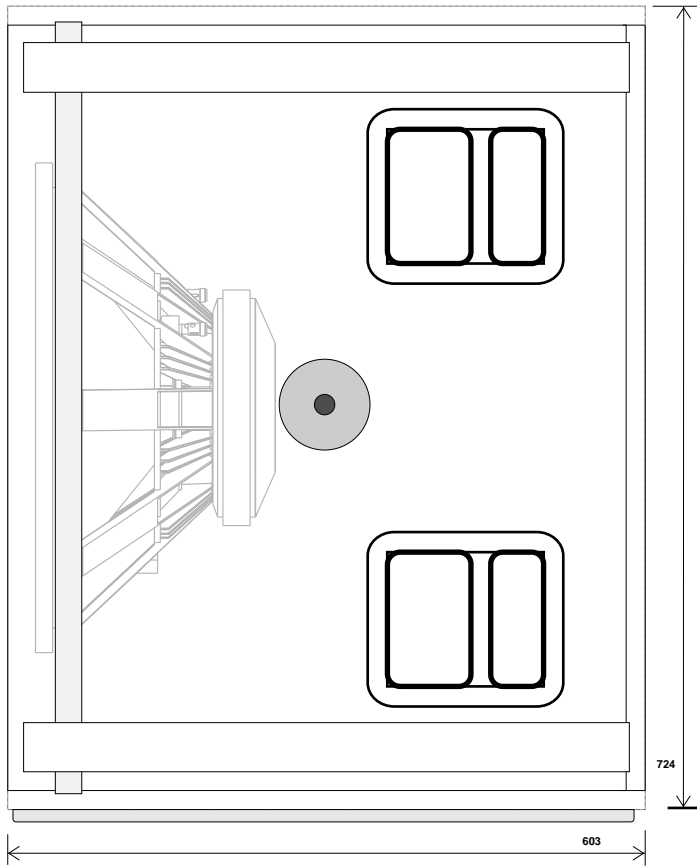

## System

Format	Q4 reflex drive
Passive Networks	n/a
Nom' impedance	8 ohms
Hi-pass filter (-3dB)	30Hz 8th order B'worth
LF power @ 8ohm	1700w aes (3400w peak)

## Performance

Sensitivity @ 1w/1m	97dB (LF)
O/P level at rated power	131 dB @ 1m
Frequency response	32 Hz - 115 Hz (± 3dB)
Dispersion	n/a

## Drive unit - LF

Drive unit size	460 mm / 18"
Voice coil diameter	115 mm / 4.5"
Chassis	cast aluminium
Magnet	neodymium
Mounting	6mm caphead bolts x 8

## Dimensions

Height	775 mm - 30.5"
Depth	603 mm - 23.70"
Depth over castors	729 mm - 28.70"
Width	542 mm - 21.35"
Gross shipping volume	309 lts - 10.90 ft <sup>3</sup>
Weight	59 Kgs - 130 lbs

## Cabinet

Panels	24 mm birch ply
Baffle	24 mm birch ply
Cabinet external	Textured Protective Coating
Handles	Top, bottom & side insert
Grille	Coated steel mesh
Skids	15 mm plywood

## Connections

Inputs	NL8 & NL4
18" connection	Pins 1+ 1-

## Pole mount hardware

Top pole mount - fitted	20mm K&M screw thread
Side pole mount - fitted	20mm K&M screw thread

## Recommended crossover points \*

High pass filter	30Hz - 8th order B'worth
Low pass filter	110Hz - 4th order L/R

Built by S.P.A. Systems Ltd  
 tel: 01 686 622 997  
 mob: 07971 882 663  
 fax: 01 686 623 233  
 email: info@shermann.com  
 web: www.shermann.com

**Shermann** is a brand name used with the permission of the owners by S.P.A. Systems Ltd.  
**Shermann** is a trade mark used with the permission of the owners by S.P.A. Systems Ltd.  
 Designs and copyright Blue Acoustic; 2010.  
 GS18x design used by Sherman with permission.  
 All rights reserved.

\* Please Note: external digital x/o settings are available for Ashly, XTA, BSS, Klark-Teknik and Xilica models.  
 The front foam used on this cabinet is not fire retardant.