


Dx Series by Shermann

Dx450

The Dx450 is also available as a Vx450 multi-role version and Mx450 dedicated stage wedge monitor

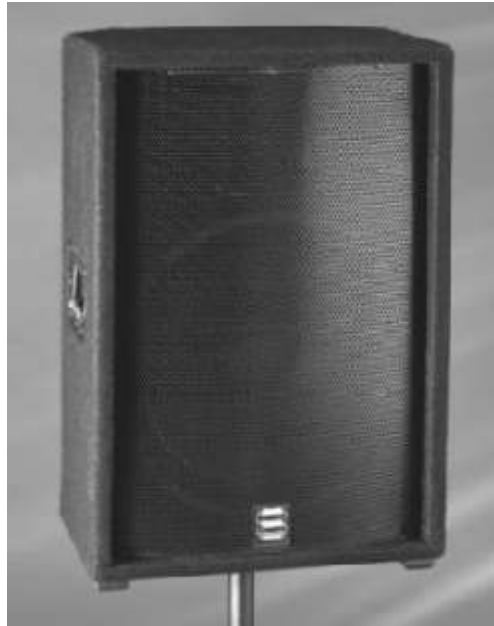

Sturdy welded mesh grille and foam front fitted as standard

The **Dx450** (previously DX-300) is a compact, lightweight two-way cabinet featuring a **15"** bass/mid driver and a high efficiency **1"** compression driver and horn unit.

This premium quality, easily transported loudspeaker finds extensive use in conference, audio-visual, vocal PA and music system applications.

The Dx450 may also be used with SHERMANN Audio BX-bass cabs to form an efficient, punchy high quality club system.

Components

Crossover boards	2.4mm glass fibre / copper tracks
Capacitors	250v polypropylene (2% tolerance)
Inductors	1 & 1.25mm wire / air cored (2.5% tolerance)
Wiring	1.5 & 2.5mm multi-strand copper
HF driver	1" ferro-fluid cooled driver on CD horn
LF driver	Steel framed 15" / 3" voice coil

Speakon NL4

Connections
pin 1+ **hot** / pin 1- **cold**

External:

Crossover frequencies
4th order 110 Hz (with SHERMANN Audio LF Systems)

Specifications

System

Format	2 way Passive
Network	PCN-3
Nom' impedance	8 ohm
Hi-pass filter (-3dB point)	35Hz / 4th order
Rec' amp' power @ 8ohm	200-450 watts rms
Programme power	600 watts

Performance

Sensitivity @ 1w/1m	99 dB
Maximum output	126 dB @ 1m
Frequency response	65 Hz - 18.5 KHz
Dispersion (>2.5kHz)	80° x 60°

Components

Drive unit (LF/MF)	380 mm (15")
Drive unit (HF)	25 mm (1")
Horn unit	CD horn

Dimensions

Height	641 mm
Depth	367 mm
Width	443 mm
External volume	99.8 lts
Weight	24.3 Kgs

Mechanical

Connectors	"Speakon" NL4 x 2
Connecting pins	1+ 1-
Flying points (option) *	GS-TA3
Handle	Steel Flip type
Stand mount (fitted)	35mm

Please note

We would like to draw your attention to the likelihood of hearing damage from prolonged exposure to high sound pressure levels.

Care should be taken when using cabinets in close proximity to the audience, musicians or artists.

For further information on the safe operation of any Syrious or SHERMANN Audio product please fax, call or email us - contact details are shown below.

* Options must be requested at time of ordering.



ShermannAudio

Unit 35, Vastre Enterprise Park
Newtown, Powys
SY16 1DZ

Tel: 0845 644 2209

Fax: 01 686 623 233

Email: sales@shermann.com

Web: www.shermann.com